

Harvest the Sunshine

JA SOLAR

440W



JAM54D41 MB n-Type Double Glass Bifacial Modules

Premium Cells

n-
Bycium+
16BB

MBB Half-Cell
Technology

26%



Cell Conversion
Efficiency


Premium Modules

Higher power
generation better LCOE

n-Type with very
lower LID

Better temperature
coefficient

Better low irradiance
response

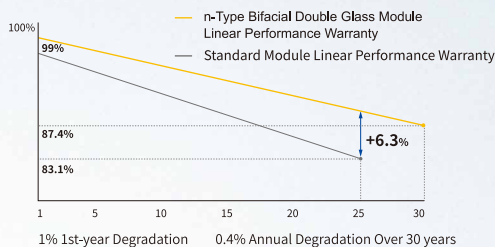


25-year product
warranty

30-year linear power
output warranty


Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing

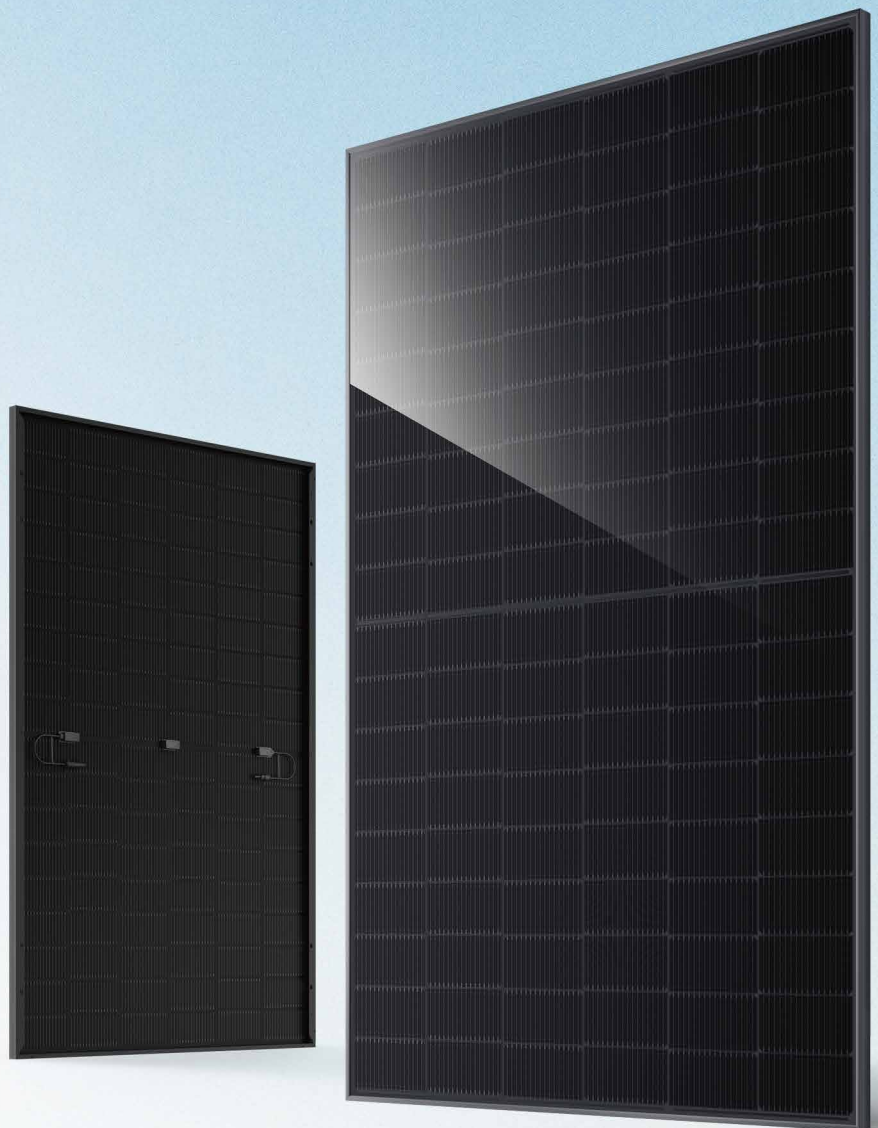

DEEP BLUE 4.0 Pro

JAM54D41 MB n-Type Double Glass Bifacial Modules

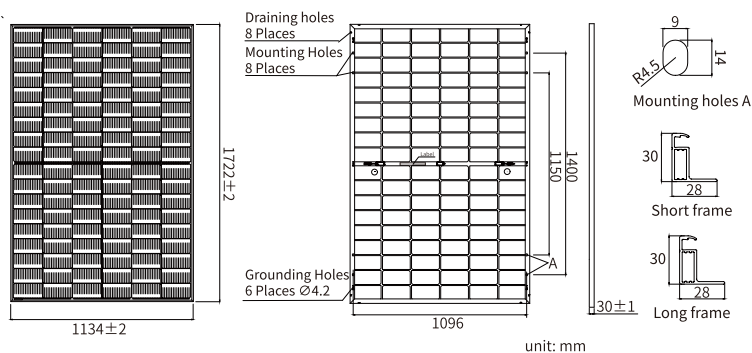

MECHANICAL PARAMETERS

Cell	Mono
Weight	21.5kg
Dimensions	1722±2mm × 1134±2mm × 30±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	108(6×18)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/ MC4-EVO2
Cable Length (Including Connector)	1200mm(+)/1200mm(-)
Front Glass/Back Glass	1.6mm/1.6mm
Packaging Configuration	36pcs/Pallet, 864pcs/40HQ Container

Customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC


TYPE	JAM54D41 -415/MB	JAM54D41 -420/MB	JAM54D41 -425/MB	JAM54D41 -430/MB	JAM54D41 -435/MB	JAM54D41 -440/MB
Rated Maximum Power(Pmax) [W]	415	420	425	430	435	440
Open Circuit Voltage (Voc) [V]	38.00	38.28	38.56	38.84	39.11	39.38
Maximum Power Voltage(Vmp) [V]	32.13	32.38	32.64	32.88	33.13	33.37
Short Circuit Current(Isc) [A]	13.60	13.65	13.70	13.75	13.80	13.85
Maximum Power Current(Imp) [A]	12.92	12.97	13.02	13.08	13.13	13.18
Module Efficiency [%]	21.3	21.5	21.8	22.0	22.3	22.5
Power Tolerance	±2%					
Temperature Coefficient of Isc(α _{Isc})	+0.045%/°C					
Temperature Coefficient of Voc (β _{Voc})	-0.250%/°C					
Temperature Coefficient of Pmax(γ _{Pmp})	-0.290%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM54D41 -415/MB	JAM54D41 -420/MB	JAM54D41 -425/MB	JAM54D41 -430/MB	JAM54D41 -435/MB	JAM54D41 -440/MB
Rated Max Power(Pmax) [W]	448	454	459	464	470	475
Open Circuit Voltage(Voc) [V]	38.00	38.28	38.56	38.84	39.11	39.38
Max Power Voltage(Vmp) [V]	32.13	32.38	32.64	32.88	33.13	33.37
Short Circuit Current(Isc) [A]	14.69	14.74	14.80	14.85	14.90	14.96
Max Power Current(Imp) [A]	13.95	14.01	14.06	14.12	14.18	14.24
Irradiation Ratio (rear/front)	10%					

CHARACTERISTICS

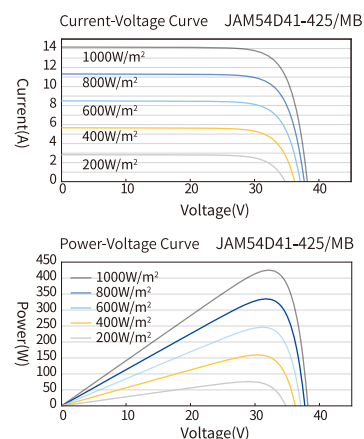

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front	5400Pa(112 lb/ft ²)
Maximum Static Load, Back	2400Pa(50 lb/ft ²)
NOCT	45±2°C
Bifaciality	80%±5%
Safety Class	Class II
Fire Performance	UL Type 38/Class C